

Inkjet Paper Easyprint

Uncoated inkjet paper
with a high white
matt surface

Surface treatment	
Base paper	
Surface treatment	

Inkload	Application LFP & Desktop		
Monochrome CAD Laser	CAD 4 Colour	Light Graphic	Graphic Art


Product features

- Universal use (piezo electronic and thermal printheads, dye and pigmented inks)
- High brightness
- Printable on both sides
- Good drying time
- Good colour density
- 4 colour laser use

Mill Rolls	Plotter Rolls	Plotter Roll Length
61.0 – 62.5 cm (24 – 24.6")	61.0 cm (24")	90 g/m ² 45 – 90 m
91.4 – 94.0 cm (36 – 37")	91.4 cm (36")	
106.7 – 108.0 cm (42 – 42.5")	106.7 cm (42")	
127.0 – 129.5 cm (50 – 51")	127.0 cm (50")	
137.2 – 139.7 cm (54 – 55")	137.2 cm (54")	
152.4 – 155.0 cm (60 – 61")	152.4 cm (60")	

Target values at 23°C / 50% r.H.
for general guidance only

	Methods	Units	
Substance	DIN ISO 536	g/m ²	90.0
Brightness CIE	DIN 53145	%	111.5
Thickness	DIN ISO 536	µm	110.0

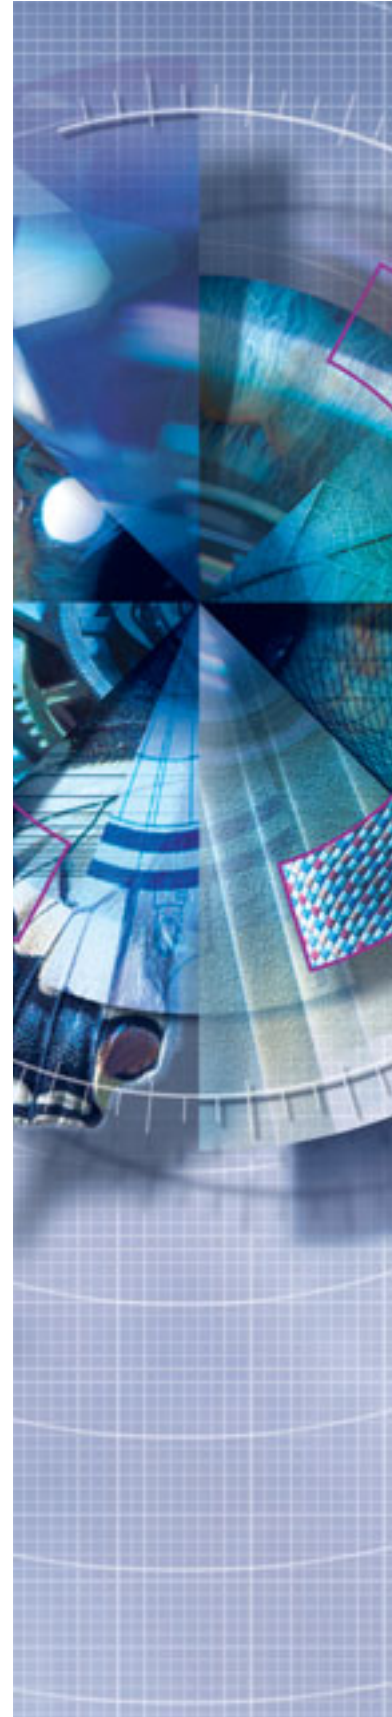

Swiss Inkjet Solutions
Qualimage

Qualimage
Cham-Tenero Paper Mills Inc.
Fabrikstrasse, CH-6330 Cham

Phone +41 (0)41 785 33 44
Fax +41 (0)41 785 33 45

mail.qualimage@qualimage-swiss.com
www.qualimage-swiss.com

A Division of
Cham-Tenero Paper Mills Inc.